



# J-TECH DIGITAL®

## USER MANUAL



### 1X8 HDMI 2.0 SPLITTER EXTENDER OVER CAT JTD-190 | JTECH-18EX50



J-TECH DIGITAL INC  
12803 PARK ONE DRIVE  
SUGAR LAND, TX 77478  
TEL: 1-888-610-2818

E-MAIL: [SUPPORT@JTECHDIGITAL.COM](mailto:SUPPORT@JTECHDIGITAL.COM)

# Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lighting strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Table of Contents

1. Introduction. ....	1
2. Features. ....	1
3. Package Contents. ....	1
4. Specifications. ....	2
5. Operation Controls and Functions. ....	3
5.1 Transmitter. ....	3
5.2 CAT Receiver. ....	5
5.3 IR Pin Out. ....	6
6. EDID Mode. ....	7
7. ASCII Commands. ....	8
8. Application Example. ....	11

## 1. Introduction

The JTECH-18EX50 HDMI 1x8 Splitter can distribute 1 HDMI source signal to up to 8 display devices simultaneously. The splitter extender supports resolutions up to 4K@60Hz 4:4:4. The JTECH-18EX50 features 1 HDMI loop output and 8 CAT outputs. It can extend the HDMI source signal up to 114 feet at the resolution of 4K@60Hz | 164 feet at 4K@30Hz | 196 feet at 1080P@60Hz via a single CAT6/6a/7 cable. The product supports one-way IR control signal pass-through, audio extraction and advanced EDID management.

## 2. Features

- HDMI 2.0, HDCP 2.2 / 1.x and DVI 1.0 compliant
- 18Gbps video bandwidth
- Supports video resolution up to 4K@60Hz 4:4:4
- Supports 3D | HDR | HDR10+ | HLG | Dolby Vision
- Supports up to 7.1CH HD audio pass-through
- Support digital and analog audio de-embedded output
- Transmission Distance: 114 feet (4K@60Hz) | 164 feet (4K@30Hz) | 196 feet (1080P@60Hz)
- 1 HDMI local loop output and 8 CAT outputs
- IR control signal pass-through
- Advanced EDID management
- Supports POC (*from transmitter to receiver*)

## 3. Package Contents

- (1) x JTECH-18EX50 Splitter Transmitter
- (8) x JTECH-18EX50 CAT Receiver
- (1) x IR Blaster Cable (*1.5 meters*)
- (8) x IR Receiver Cable (*1.5 meters | 20KHz - 60KHz*)
- (1) x 12V/2.5A DC Locking Power Adapter
- (1) x User Manual

## 4. Specifications


Technical	
HDMI Compliance	HDMI 2.0
HDCP Compliance	HDCP 2.2/1.x
Video Bandwidth	18 Gbps
Video Resolution	Up to 4K@60Hz 4:4:4
Color Depth	8-bit,10-bit,12-bit(1080p@60Hz) 8-bit (4K@60Hz YUV4:4:4) 8-bit,10-bit,12-bit (4K@60Hz YCbCr 4:2:2/4:2:0)
Color Space	RGB   YCbCr 4:4:4 / 4:2:2   YUV 4:2:0
HDR	HDR10   HDR10+   HLG   Dolby Vision
HDMI Audio Formats	LPCM   Dolby Digital/Plus/EX   Dolby True HD   DTS   DTS-EX   DTS-96/24   DTS High Res   DTS-HD Master Audio   DSD
Coaxial Audio Formats	LPCM 2.0   LPCM 5.1   Dolby Digital 2/5.1CH
Analog Audio Formats	PCM 2.0
ESD Protection	Human body model—±8kV (Air-gap discharge) & ±4kV (Contact discharge)
Interface	
Input	1 x HDMI Type A (19-pin female)
Output	1 x HDMI Type A (19-pin female) 8 x CAT OUT (RJ45, 8-pin female) 1 x Coaxial Audio OUT (RCA) 1 x L/R Audio OUT (3.5mm Stereo Mini-jack)
Control	1 x SERVICE (Micro USB, Update port ) 1 x EDID DIP switch (5-pin) 1 x IR OUT (3.5mm Stereo Mini-jack)

Mechanical	
Housing	Metal Enclosure
Silkscreen Color	Black
Dimensions	Transmitter: 11.8 in (W) x 3.94 in (D) x 1.10 in (H) Receiver: 0.31 in (W) x 2.40 in (D) x 0.71 in (H)
Weight	Transmitter: 1.81 Lbs.   Receiver: 0.34 Lbs. (each)
Power Supply	Input: AC100 - 240V 50/60Hz Output: DC 12V/2.5A (US/EU standards   CE/FCC/UL certified)
Power Consumption	25.44W
Operation Temperature	32°F ~ 104°F   0°C ~ 40°C
Storage Temperature	-4°F ~ 140°F   -20°C ~ 60°C
Relative Humidity	20 ~ 90% RH (non-condensing)

## 5. Operation Controls and Functions


### 5.1 Transmitter Panel

#### Front Panel




No.	Name	Function Description
1	POWER Switch	Press this switch to power on/off the device
2	POWER LED	When the device is powered on, the LED will illuminate red
3	IN LED	When the HDMI IN port connects to an active source device, the LED will illuminate green
4	LOOP LED	When the HDMI LOOP OUT port connects to an active display device, the LED will illuminate green
5	OUT LED (1~8)	When the CAT OUTPUT port connects to the CAT IN port of CAT receiver, the corresponding LED will illuminate green

## Rear Panel




No.	Name	Function Description
1	AUDIO OUT (COAX, L/R)	Coaxial/analog audio output port; connect to amplifier or speaker
2	HDMI Port	IN: HDMI input port; connect to HDMI source device with HDMI cable LOOP OUT: HDMI loop output port; connect to HDMI display device with an HDMI cable
3	CAT OUTPUT Port (1~8)	Connect to the CAT IN port of the CAT receiver with a CAT cable
4	Link Signal Indicator LED (Green)	<ul style="list-style-type: none"> <li>▪ Illuminating: Transmitter and receiver are connected</li> <li>▪ Dark: Transmitter and receiver are not connected</li> </ul>
5	Data Signal Indicator LED (Orange)	<ul style="list-style-type: none"> <li>▪ Illuminating: HDMI signal with HDCP</li> <li>▪ Flashing: HDMI signal without HDCP</li> <li>▪ Dark: No HDMI signal</li> </ul>
6	IR OUT	Connect the IR Blaster cable to transmit IR signal from the CAT receiver
7	DC 12V	Plug the DC 12V power supply into the unit and connect the adaptor to an AC outlet. <b>(Note: The transmitter can power the receivers via CAT cable)</b>

## Side Panel



No.	Name	Function Description
1	EDID DIP Switch	Used to set EDID mode. Please refer to Section "6. EDID Mode" for details
2	SERVICE Port	Used for firmware update or serial port command control

## 5.2 CAT Receiver

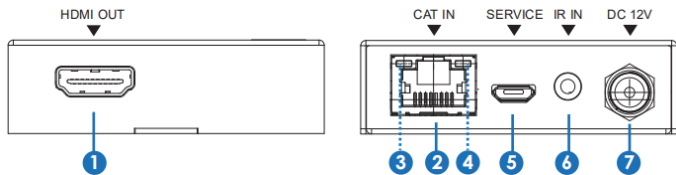

No.	Name	Function Description
1	HDMI OUT	HDMI output port; connect to HDMI display with an HDMI cable
2	CAT IN	Connect to the CAT OUTPUT port on the transmitter with a CAT cable
3	Power Indicator LED (Green)	When the receiver is powered on, the LED will illuminate green
4	Data Signal Indicator LED (Orange)	<ul style="list-style-type: none"> <li>▪ Illuminating: HDMI signal with HDCP</li> <li>▪ Flashing: HDMI signal without HDCP</li> <li>▪ Dark: No HDMI signal</li> </ul>
5	SERVICE port	Used for firmware update
6	IR IN	Connect to the IR Receiver cable; the IR signal will send to the IR OUT port of the transmitter
7	DC 12V	<p>Plug DC 12V/1A power supply into the unit and connect the adapter to an AC outlet.</p> <p><b>(Note: The CAT receiver also can be powered by the transmitter via PoC)</b></p>



### 5.3 IR Pin Out



IR RECEIVER



IR BLASTER

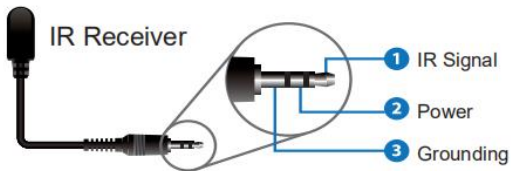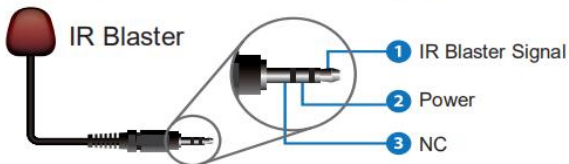

**Note:** When the angle between the IR receiver and the remote control is  $\pm 45^\circ$ , the transmission distance is 0-5 meters; when the angle between the IR receiver and the remote control is  $\pm 90^\circ$ , the transmission distance is 0-8 meters.



## 6. EDID Mode

The defined EDID setting list of the product is shown as below:

<b>EDID Mode</b>	<b>EDID Description</b>
11111	1080P, Stereo Audio 2.0
11110	1080P, Dolby/DTS 5.1
11101	1080P, HD Audio 7.1
11100	1080I, Stereo Audio 2.0
11011	1080I, Dolby/DTS 5.1
11010	1080I, HD Audio 7.1
11001	1080P 3D, Stereo Audio 2.0
11000	1080P 3D, Dolby/DTS 5.1
10111	1080P 3D, HD Audio 7.1
10110	4K2K30Hz_444, Stereo Audio 2.0
10101	4K2K30Hz_444, Dolby/DTS 5.1
10100	4K2K30Hz_444, HD Audio 7.1
10011	4K2K60Hz_420, Stereo Audio 2.0
10010	4K2K60Hz_420, Dolby/DTS 5.1
10001	4K2K60Hz_420, HD Audio 7.1
10000	4K2K60Hz_444, Stereo Audio 2.0
01111	4K2K60Hz_444, Dolby/DTS 5.1
01110	4K2K60Hz_444, HD Audio 7.1
01101	4K2K60Hz_444, Stereo Audio 2.0 HDR
01100	4K2K60Hz_444, Dolby/DTS 5.1 HDR
01011	4K2K60Hz_444, HD Audio 7.1HDR
01010	COPY_FROM_LOOP OUT
01001	COPY_FROM_CAT OUT1
01000	COPY_FROM_CAT OUT2
00111	COPY_FROM_CAT OUT3
00110	COPY_FROM_CAT OUT4
00101	COPY_FROM_CAT OUT5
00100	COPY_FROM_CAT OUT6
00011	COPY_FROM_CAT OUT7
00010	COPY_FROM_CAT OUT8
00001	1080P, Stereo Audio 2.0
00000	PC control mode

## 7. ASCII Commands


The JTECH-18EX50 also supports ASCII command control. Connect the SERVICE port of the product to a PC with a USB cable. Then, open a Serial Command tool on PC to send ASCII commands to control the product. The ASCII command list about the product is shown as below.

ASCII Commands				
Serial Port Protocol - Baud Rate: 115200   Data Bits: 8-bit   Stop Bits:1   Check Bit: 0				
x - Parameter 1 y - Parameter 2 ! - Delimiter				
Command Code	Function Description	Example	Feedback	Default Setting
<b>Power</b>				
s power z!	Power on/off the device z=0~1 (z=0 power off, z=1 power on)	s power 1!	Power on  System Initializing... Initialization Finished! FW version x.xx.xx	power on
r power!	Get current power state	r power!	power on/power off	
s reboot!	Reboot the device	s reboot!	reboot	
<b>System Setup</b>				
help!	List all commands	help!		
r type!	Get device model	r type!	HDC-SPB18D60	
r status!	Get device current status	r status!	Obtain power status, in/out connection & EDID mode information	
r fw version!	Get firmware version	r fw version!	MCU BOOT: Vx.xx.xx MCU APP: Vx.xx.xx	
r link in!	Get the connection status of the input port	r link in!	HDMI IN: connect	
r link out y!	Get the connection status of the y output port y=0~8(0=all, 1~8=CAT 1~8)	r link out 1!	CAT OUT1: connect	
r link loop out y!	Get the connection status of the y loop output port   y=1	r link loop out 1!	HDMI LOOP OUT: connect	
s reset!	Reset to factory defaults	s reset!	Reset to factory defaults  System Initializing... Initialization Finished! FW version x.xx.xx	

Command Code	Function Description	Example	Feedback	Default Setting
<b>Output Setting</b>				
s hdmi stream z!	Set HDMI loop output stream on/off z=0~1(0:disable,1:enable)	s hdmi stream 1 !	Enable HDMI loop out stream Disable HDMI loop out stream	enable
s cat y stream z!	Set cat output y stream on/off, y=0~8(0=all) z=0~1 (0:disable,1:enable)	s cat 1 stream 1 ! s cat 0 stream 1 !	Enable cat output 1 stream Disable cat output 1 stream Enable cat all outputs stream Disable cat all outputs stream	enable
r hdmi stream!	Get HDMI loop out stream status	r hdmi stream!	Enable HDMI loop output stream	
r cat y stream!	Get cat output y stream status, y=0~8(0=all)	r cat 1 stream!	Enable cat output 1 stream	
s hdmi hdcp z!	set HDMI loop output port HDCP status	s hdmi hdcp 1!	HDMI loop out HDCP on	all hdmi out hdcp active
r hdmi hdcp!	Get HDCP status of loop out	r hdmi hdcp!	HDMI loop out HDCP on	
s cat y hdcp z!	set cat output y port HDCP status y=0~2(0=all) z=0~1 (1=on,0=off)	s cat 1 hdcp 1!	cat out 1 HDCP on	all cat out hdcp active
r cat y hdcp!	Get HDCP status of cat out y, y=0~2(0=all)	r cat 1 hdcp!	cat out 1 HDCP on	
s cat y dsc mode z!	set cat output y port dsc mode status y=0~8(0=all) z=1~3 (1=Cat cable distance normal Mode, 2= Cat cable distance 35M Mode,3= Cat cable distance 70M Mode)	s cat 1 dsc mode 2!	cat out 1 dsc mode 2	Cat cable distance 35M Mode(35M)
r cat y dsc mode!	Get dsc mode of cat out y, y=0~8(0=all)	r cat 1 dsc mode!	cat out 1 dsc mode 2	
s audio mute 1!	set audio output port mute status (1-mute, 0-umute)	s audio mute 1!	s audio mute 1	s audio unmute (0)
r audio mute!	Get audio output mute status	r audio mute!	audio mute 1	

Command Code	Function Description	Example	Feedback	Default Setting
<b>EDID Setting</b>				
s edid in from z!	Set input EDID from default EDID z, z=1~30 1. 1080p,Stereo Audio 2.0 2. 1080p,Dolby/DTS 5.1 3. 1080p,HD Audio 7.1 4. 1080i,Stereo Audio 2.0 5. 1080i,Dolby/DTS 5.1 6. 1080i,HD Audio 7.1 7. 3D,Stereo Audio 2.0 8. 3D,Dolby/DTS 5.1 9. 3D,HD Audio 7.1 10. 4K2K30_444, Stereo Audio 2.0 11. 4K2K30_444, Dolby/DTS 5.1 12. 4K2K30_444,HD Audio 7.1 13. 4K2K60_420, Stereo Audio 2.0 14. 4K2K60_420, Dolby/DTS 5.1 15. 4K2K60_420,HD Audio 7.1 16. 4K2K60_444, Stereo Audio 2.0 17. 4K2K60_444, Dolby/DTS 5.1 18. 4K2K60_444,HD Audio 7.1 19. 4K2K60_444, Stereo Audio 2.0 HDR 20. 4K2K60_444, Dolby/DTS 5.1 HDR 21. 4K2K60_444, HD Audio 7.1 HDR 22. copy from hdmi loop out 23. copy from cat output 1 24. copy from cat output 2 25. copy from cat output 3 26. copy from cat output 4 27. copy from cat output 5 28. copy from cat output 6 29. copy from cat output 7 30. copy from cat output 8	s edid in from 1!	input EDID:1080p, Stereo Audio 2.0  Please toggle EDID dip switch to 00000!	1080p,Stereo Audio 2.0
r edid in!	Get EDID status of the input	r edid in!	input EDID: 4K2K60_444,Stereo Audio 2.0	
r edid in data!	Get EDID data of the HDMI input	r edid in data!	EDID data : 00 FF FF FF FF FF FF FF 00 .....	

## 7. Application Example

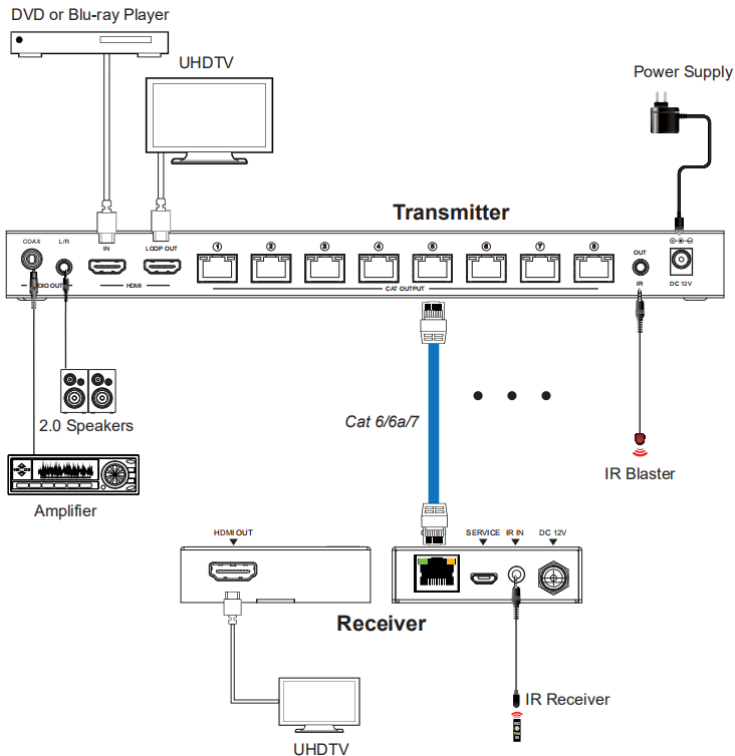

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



[WWW.JTECHDIGITAL.COM](http://WWW.JTECHDIGITAL.COM)

PUBLISHED BY J-TECH DIGITAL, INC.

12803 PARK ONE DRIVE

SUGAR LAND, TX 77478