




Website: www.jtechdigital.com
Toll Free: 1-888-610-2818
Email: support@jtechdigital.com

USER MANUAL

J-Tech Digital® 8-Port Powered HDMI Splitter
Model: JTD3DSP0108



Introduction

Thank you for purchasing this product. J-Tech Digital products offer cost effective AV solutions to any scenario, including security, home, commercial and live applications.

The J-Tech Digital JTD3DSP0108 1x8 splitter allows you to connect a single HDMI source, such as a cable box, DVD player or game system, to 8 HDMI displays simultaneously. Experience video in full 1080P resolution when using compatible sources and displays. The JTD3DSP0108 also supports multi-channel audio formats such as Dolby Digital®, DTS and DSD for a complete immersive experience. With deep color 36-bit color depth and 3D content support, users can enjoy their media the way it was intended.

Features

- HDMI Input - 1080p @ 60hz (3D Capable)
- HDMI Output – 1080p @ 60hz (3D Capable)
- Distribute 1 HDMI source to 8 HDMI displays simultaneously
- Supports multi-channel audio formats – Dolby TrueHD, DTS-HD Master Audio

Packaging Contents


- (1) JTD3DSP0108 1x8 HDMI Splitter
- (1) 5VDC 2A Power Supply
- (1) User Manual

Panel Descriptions



Front

- ① **Power Status LED Indicator** – LED will emit a red light when the splitter is powered on
- ② **HDMI Output Status LED** – L1 – L8 Status LEDs will emit a green light when an HDMI display is connected to corresponding output. (*L1 = Output 1, L2 = Output 2, etc.*)
- ③ **Power On/Off Toggle Switch** – Press the toggle switch to the “-” position to power the splitter on. Press the toggle switch to the “o” position to power the splitter off.

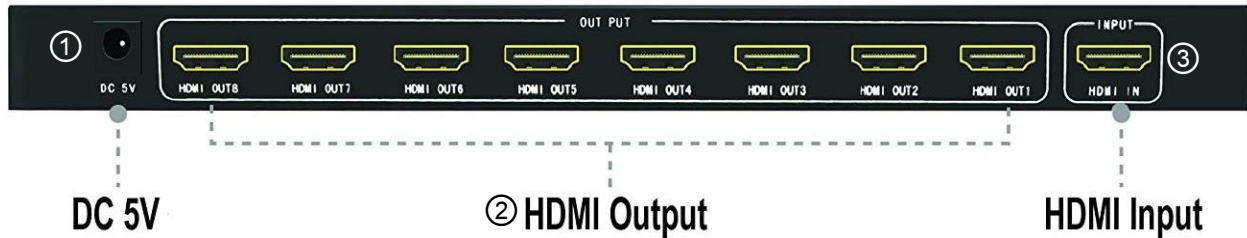

Rear

- ① **Power Adapter Input Port** – Connect the provided 5VDC 2A power supply to the JTD3DSP0108 splitter
- ② **HDMI Output Ports (1-8)** – Connect HDMI displays to **HDMI Out** ports 1-8
- ③ **HDMI Input Port** – Connect HDMI source device to **HDMI In** port

Specifications

HDMI Connector Type.....	HDMI Type A 19-Pin Female
HDMI Version.....	HDMI Ver 1.3b
Supported HDMI Resolution.....	1080p/1080i/720p/576p/576i/480p/480i/3D Video
Supported Refresh Rates.....	30/60Hz
Supported Audio Formats.....	PCM/Dolby Digital/DTS/DTS-HD Master Audio/Dolby True-HD
Supported Video Color Format.....	Xv-YCC/Deep Color 36-Bit
Power Adapter.....	Input – AC(50/60Hz) 100V-240V; Output – DC 5V/2A
Power Consumption.....	10 Watts (Max)
Max Working Current.....	1.4A
Operating Temperature Range.....	5°F to 131°F
Operating Humidity Range.....	5 to 90% RH
Dimensions (L x W X H).....	270 mm x 110 mm x 27.5mm
Weight.....	5 oz
Model.....	JTD3DS0108



Scan this QR code using your smartphone to view the full J-Tech Digital Product Lineup!



Have more questions? Scan this QR code using your smartphone to contact us!



www.jtechdigital.com

J-Tech Digital®
12803 Park One Drive
Sugar Land, TX 77478

- Product pictures are for reference only.
- Specifications, pictures & software described herein are subject to change without prior notification.
- Only use the provided power supply when operating this unit. J-Tech Digital® is not responsible for any damage due to customer neglect.
- All trademarks are the sole property of their respective companies.
- Copyright ©J-Tech Digital, Inc. All rights reserved.